

TECHNICAL DATA SHEET



Validation date: 02/12/2008



ISO 9001

STANDARD RANGE 2PURB40/FPS

CONVEYOR BELT TPU WHITE

Complies with FDA and EU regulations for conveying of foodstuff

CONSTRUCTION

- 2** 2-ply polyester fabric
PUR TPU polyurethan
B Colour : white
40 Top cover thickness : 0,40 mm
FPS "Rice grain" positive pattern, easy to clean with sealed ed

MAIN TECHNICAL DATA


- Top cover:** hardness: 85 Sh.A surface: mat, smooth
Total thickness: 0,091" $\pm 0,0039$ " per ply
Weight per Sq Ft: 0,53 lbs $\pm 10\%$
Friction Coefficient on steel slider bed: 0,50 $\pm 20\%$
Manufacturing width: 59,06"
Temperatures:
* Product temperature: -40°F to +194°F
* Ambient temperature: -13°F to +140°F
Type of support: Slider bed, rollers, PEHD...

MECHANICAL DATA

Tolerances: +20% -10%

- Breaking load:** 1 142 lbs/in.
Load for 1% extension: 80 lbs/in.
Maximum working tension: 114 lbs/in.

- Pulley diameters:** (recommended as a minimum with a 70°F ambient temperature)

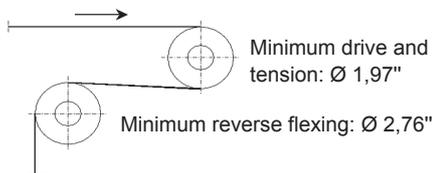

These values are not linked to the requested Ø to pull the belt to rotation.

- Ambient temperature: from 32°F to +46°F: add +50%
from 32°F to -13°F: add +100%


ENDLESS JOINTINGS

- Top heating plate: 320°F $\pm 20^\circ F$
Bottom heating plate: 320°F $\pm 20^\circ F$
Time: 2 mn ± 1 mn
Pressure: 15 psi ± 7 psi
Additional material (powder or film): none

These recommendations may vary according to the equipment used and press heating system.

Splicing methods to be used:

DS (finger joint)



- Fasteners:** SL02 - Sécura 01 - Sécurinox 1
- Minibelt - Sécuri G2

- Accessories that may be fitted on this belt:** Except for some cases, this belt can be fitted out with : guiding profiles, cleats, sidewalls

These data are subject to modification. Please make sure of their validity.

REVEYRON S.A. should not be held responsible when the data sheet used is not valid anymore.

reveyron S.A.

247, route du Mas Rillier, Les Echets - 01700 MIRIBEL - France

Tel.: +33 4 78 91 81 01

Fax: +33 4 78 91 05 09

www.reveyron.com

E.mail: info@reveyron.com